

duplicated routing control packets. They used the concept of selective flooding instead of normal flooding, thus reduces the control overhead. Their proposed model is found to be better in terms of energy conservation, routing overhead and in conserving network resources. Kavitha Subramaniam et al. [12] worked on buffer management to reduce the energy consumption of network by efficient management of buffers. Efficient management of buffers leads to reduced energy consumption and increasing packet delivery ratio. J Sandeep et al. [5] worked on energy optimization for military operation by distributing the load among multiple nodes and by identifying the critical nodes. Simulation results proved that the proposed scheme is better in terms of energy consumption and packet delivery ratio. K. Seshadri Ramana et al. [13] proposed a tree based Heuristics to Multicast Route Discovery (HMRD) model. They used heuristic to determine the intermediate node with maximum residual energy and minimal energy usages. The proposed model is found better in terms of maximal residual energy and minimal energy consumption. S. Beski Prabakaran et al. [14] presents a metaheuristic based routing algorithm that use to find the energy efficient intermediate node. They also optimized the energy consumption by an efficient load distribution and random path selection among network. Santosh Kumar Das et al. [15] proposed an Intelligent Energy-aware Efficient Routing protocol for MANET (IE2R) that used Multi Criteria Decision Making (MCDM) technique based on entropy and Preference Ranking Organization METHod. The proposed method have shown better result in terms of several network metrics. S.K. Nagula Meera et al. [16] proposed a tree based Minimal Energy usage Competent Multicast Steiner Tree based Route Discovery (ECMST) that use genetic algorithm to calculate the maximal residual energy and minimal energy usages of intermediate nodes. The experimental results proved that the performance ECMST is the best of in its class to discover multicast route.

2.2 Literature review of scalability aware multicast algorithms

The highly dynamic topology and uncertain behavior of mobile ad hoc networks poses significant challenges for group management. As the group size increases throughput, packet delivery ratio, end to end delay and control overhead start diminishing. Node's unpredictable motion often change the structure of multicast tree, results in, frequent updates in routing tables to refresh the multicast tree for uninterrupted communication. Scalability support in multicast is still an unexplored area and needs a better attention for uninterrupted communication in MANET. Ben Newton et al. [17] exploit the position of the nodes to forward the packets to the destination, thus reduced the number of hops and control overhead carried by packet header. Their proposed Topology Aware Geographic Routing (TAG) outperforms over previous algorithms of similar nature. Kasun Samarasinghe et al. [18] proposed a Greedy Zone Routing (GZR) that assigns greedy coordinates to the whole zone (collection of nodes) rather than the individual nodes within zone. In GZR communication is done in two levels: greedy geographic routing is used to carry out inter zone communication and conventional tree based routing is performed within zone. This scheme has small routing tables and found to be superior as control overhead reduced up to 50% as compared to other greedy approaches. Jaspreet Singh et al. [19] propose a scalable multicast by distributing the traffic among different available path rather than flooding on few paths. In order to keep the scheme light weighted they use to vary the degree of distribution among alternate path. Simulations results show its superiority in terms of scalability.

D. Srinivasa Rao et al. [20] proposed a poly mesh routing protocol (PMRP) for efficient management of cluster. This scheme also use two different approaches to find the route: inter cluster route use on demand whereas intra cluster use table driven approach to find the route. Bharti Sharma et al. [21] proposed a fast and fault tolerant scheme to choose the group leader on the basis of local information. This scheme is based on layered architecture based on cluster formation followed by ring formation of cluster heads and finally the leader election algorithm. This scheme found to be better in terms of maintaining scalability and throughput. Pramita Mitra, Christian Poellabauer [22] presents a group communication algorithm that uses the velocity and location of moving nodes to provide bandwidth efficient multicast between a source and its destinations (i.e., group members) by utilizing the concept of location aware mobile environments. They also proposed a model that is able to predict the movement of mobile group members for a better communication.

3. Simulation and analysis

3.1 Energy consumption analysis of MAODV and PUMA algorithms

Here we have analyzed the energy consumption by the nodes in MAODV and PUMA algorithm using NS-2 simulator. Following will be the simulation parameters:

Table 1: Simulation configuration

Simulation Parameters	
Node(s)	30
Sender	1
MAC Protocol	802.11
Terrain	1200x1200
Ad Hoc Multicast Routing Protocol(s)	MAODV, PUMA
Simulation Time	10 Seconds
Group Size	1
Propagation Model	TwoRayGround
Simulator	NS-2
Node's Speed	120ms
Queue Type	DropTail/Priority Queue
Initial Energy	10.0j
Traffic Type	CBR
Packet Size	512 Bytes
IFQ Length	50
Simulation Scenario(s)	Normal Execution Environment: MAODV PUMA

Each node in the network is defined with initial level of energy in beginning of simulation, termed as initial energy. In simulation, initial level of energy is passed as an input. A node consumes a specific amount of energy in transmission and receiving of every packet. As a result, the value of initial level of energy in a node starts decreasing. When the result between the initial energy and current energy reaches to zero, nodes become dead and stops transmission and receiving. The graph represents that PUMA is more efficient in terms of energy consumption as compared to MAODV, due to low control overhead.

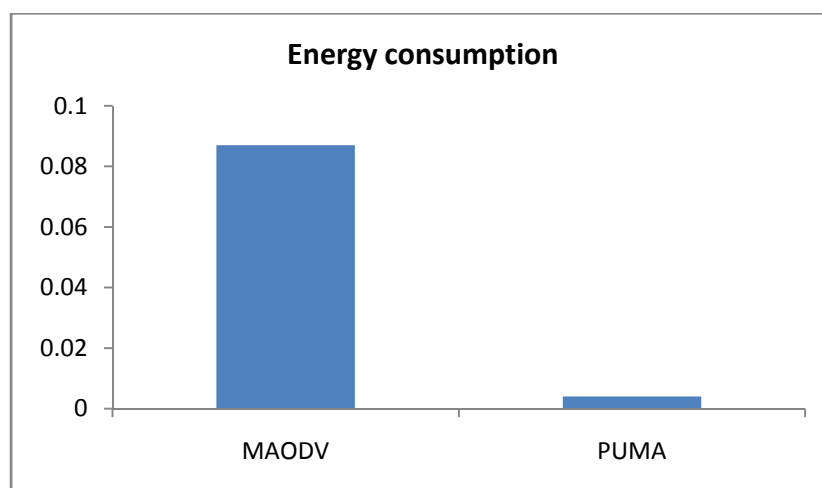


Fig. 3 Energy consumption by MAODV and PUMA

3.2 Scalability Analysis of MAODV algorithm

Here we have analyzed the normal behavior of MAODV in term of its scalability by increasing the node density. Analysis is done to observe the impact of node density and group size over throughput, PDR, routing load and end to end delay. Simulation analysis is done in NS-2 simulator under the following configuration:

Table 2: Simulation configuration

Simulation Parameters	
Node(s)	30
Sender	1
MAC Protocol	802.11
Terrain	1200x1200
Ad Hoc Multicast Routing Protocol(s)	MAODV
Simulation Time	10 Seconds
Group Size	1, 2,4
Propagation Model	TwoRayGround
Simulator	NS-2
Node's Speed	120ms
Queue Type	DropTail/Priority Queue
Initial Energy	10.0j
Traffic Type	CBR
Packet Size	512 Bytes
IFQ Length	50
Simulation Scenario(s)	Group Size-1-Node(s)-30 Group Size-2-Node(s)-30 Group Size-4-Node(s)-30 Group Size-1-Node(s)-60 Group Size-2-Node(s)-60 Group Size-4-Node(s)-60 Group Size-1-Node(s)-90 Group Size-2-Node(s)-90 Group Size-4-Node(s)-90

Group Size-1,2,4 Node(s)-30

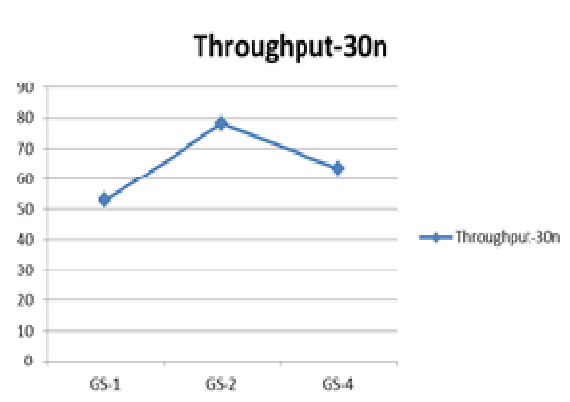


Fig. 4 Throughput

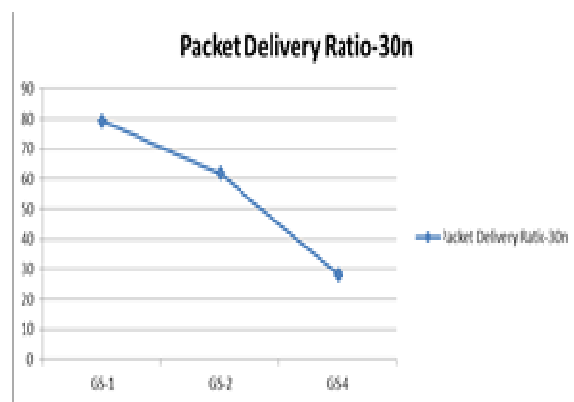


Fig. 5 Packet Delivery Ratio

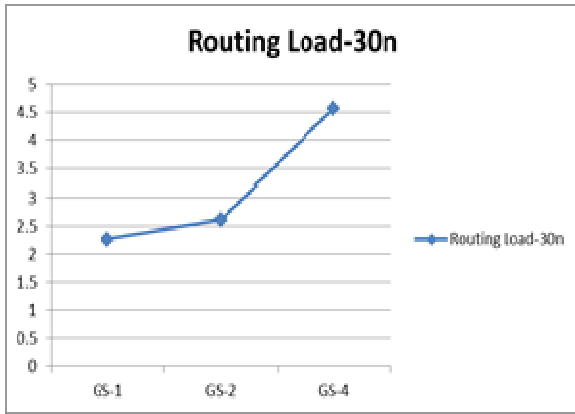


Fig. 6 Routing Load

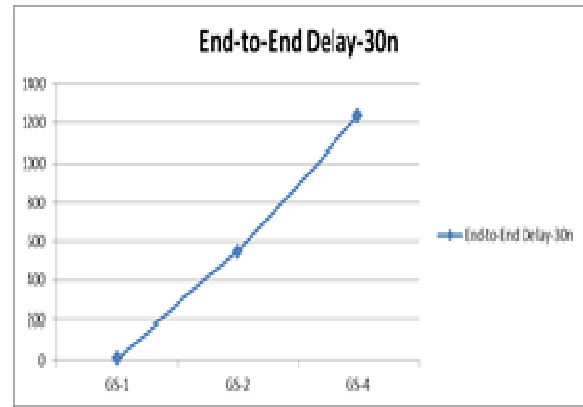


Fig. 7 End-to-End-Delay

Group Size-1,2,4 Node(s)-60

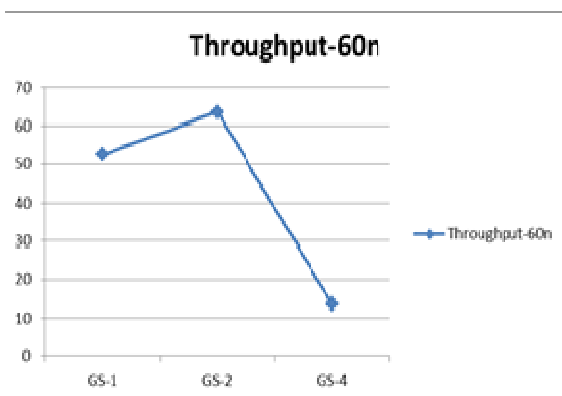


Fig. 8 Throughput

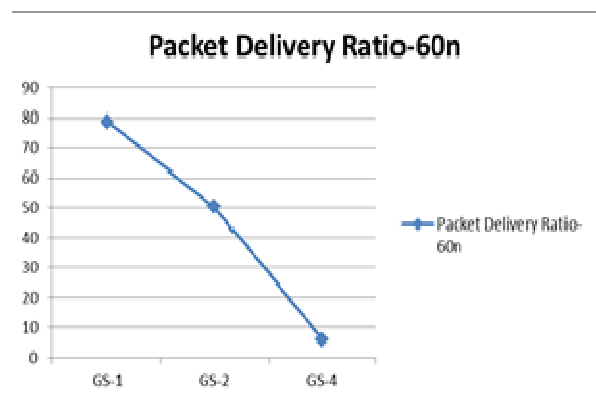


Fig. 9 Packet Delivery Ratio

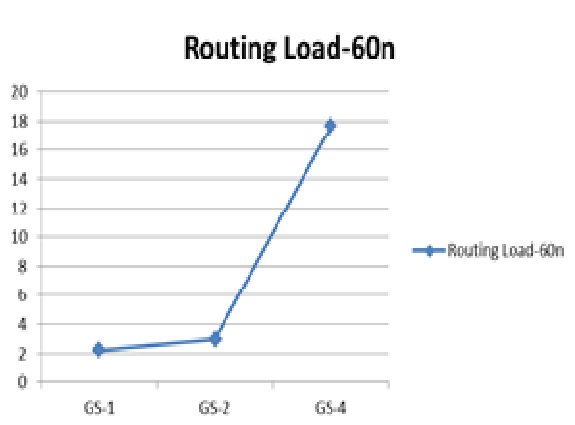


Fig. 10 Routing Load

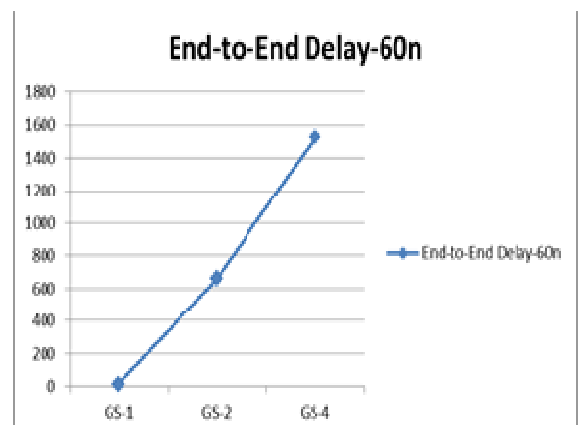


Fig. 11 End-to-End-Delay

Group Size-1,2,4 Node(s)-90

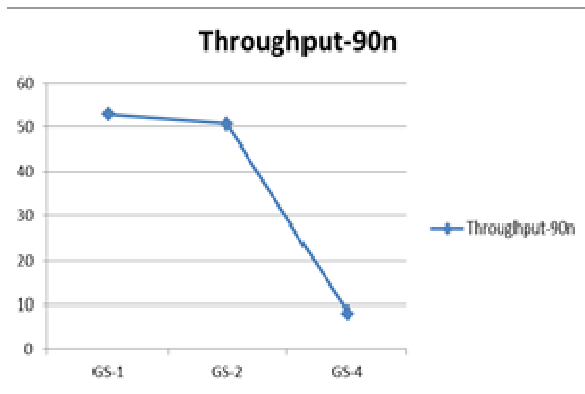


Fig. 12 Throughput

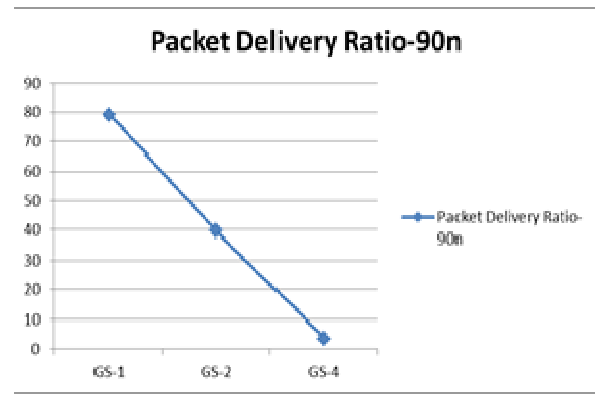


Fig. 13 Packet Delivery Ratio

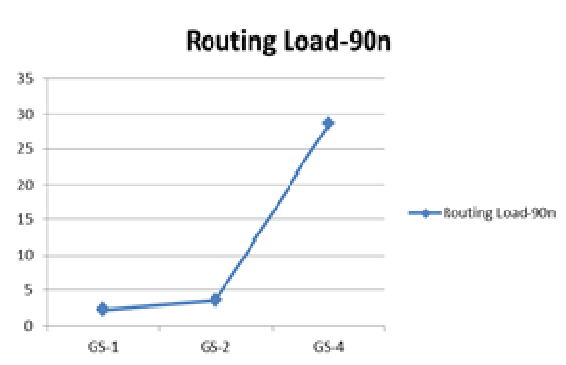


Fig. 14 Routing Load

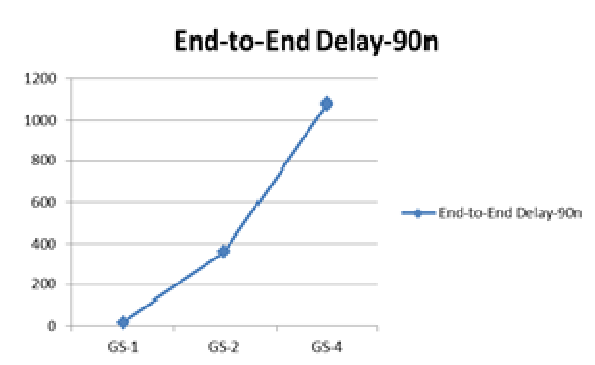


Fig. 15 End-to-End-Delay

From simulation results it has been observed that MAODV perform better in moderate group size. As the number of nodes and group size increases the throughput and packet delivery start decreasing, while the routing load and end to end delay start increasing. Therefore scalability aware multicast algorithm is an important issue need to be addressed in future to accommodate more number of mobile nodes without performance degradation.

4. FUTURE DIRECTIONS FOR ENERGY EFFICIENT MULTICAST

1. Load sharing of an individual node in situation of high traffic can increase the life time of heavily loaded node. Many researchers are working on this open and challenging issue in MANET.
2. Buffer management of an individual node can be another technique to optimize the limited battery power in MANET. Buffer management can be achieved by regulating the transmission and receiving of packets.
3. High residual energy (RE) of node can be used as metric for the selection of next node. Residual energy refers to the remaining energy available in the node after the transmission. It can be calculated with the help of mathematical formula:

$$RE = Pt \times Ep$$

Where Pt is number of packet transmitted.

Ep is energy required for transmitting one data packet.

In these protocols, next hop is chosen on the basis of residual energy.

4. Efficient management of mesh and tree structure can reduce the control overhead that lead to energy saving of the node.
5. Congestion control mechanism can be devised to overcome the issue of energy of a node. Congestion occurs when there are limited resources to satisfy the demand of the network. There are many existing congestion control algorithms in MANET that can be extended further to optimize the energy issues.

6. Mesh based protocols can be optimized by opting selective flooding rather than normal flooding may reduce the unnecessary control overhead, thus reduce the node's energy consumption.
7. Route discovery can be optimized within cluster and inter cluster to reduce the control overhead involved in path finding from source to destination. This will help us in saving the battery power of a node.

5. FUTURE DIRECTIONS FOR SCALABLE MULTICAST

1. Efficient cluster or zone management can be done to reduce the size of routing table and control overhead to achieve the scalable multicast routing.
2. Position of a node can be used as a metric for better forwarding decision, thus reducing the number of hops and control overhead to maintain scalability.
3. Quick and fault tolerant election of group leader will be helpful in achieving better scalability.
4. Load balancing techniques can be explored and used to achieve better scalability by reducing the control overhead.
5. Optimized node insertion techniques and route list table update techniques can be developed to achieve better scalability.
6. Dynamic topology and node mobility behavior of nodes can be utilized to propose better results in terms of scalability with improved QoS parameters.
7. Scalability can be increased by limiting the numbers of error forwarding nodes.

6. CONCLUSION AND FUTURE SCOPE

MANETs supported applications are gaining over other group communication techniques due its low cost and quick deployment. But its advantages are associated with many challenges issues due to its unique characteristics. Energy efficient and scalable multicast algorithms are among most open and challenging QoS parameter that needs to address by research fraternity. In this paper, an extensive analysis and literature survey of work done in this direction has been done to provide a better roadmap to pursue research on these issues. We further conclude that, MAODV performs better with moderate network size. PUMA is better than MAODV in terms of energy consumption at preliminary stage. Each multicast algorithm has its own set of rules that triggers when a node join or leave the group, therefore a single solution for allmulticast is an open and challenging issues. In next papers we will propose some scheme for better energy consumption and scalability support in multicast algorithms over MANET.

References

- [1] Mohammad Amir KhusrAkhtar, GadadharSahoo, "Enhancing cooperation in MANET using neighborhood compressive sensing model", Elsevier's Egyptian Informatics Journal, June 2016.
- [2] Dinesh Chander, Rajneesh Kumar, "A Survey of Issues in Supporting QoS based Multicast Routing Protocols over MANETs", International Journal of Computer Applications (0975 – 8887) Volume 112 – No 13, February 2015.
- [3] Waheb A. Jabbar, Mahamod Ismail et al., "Power-efficient routing schemes for MANETs: a survey and open issues", Springer, Wireless Netw, April 2016.
- [4] Gyanappa A. Walikar, Rajashekar C. Biradar, "Energy aware multicast routing in mobile ad-hoc networks using NS-2", published in Electrical, Computer and Communication Technologies (ICECCT), 2015 IEEE International Conference, 27 August 2015.
- [5] J Sandeep, J Satheesh Kumar, "Efficient packet Transmission and Energy Optimization in Military Operation Scenarios of MANET", Elsevier Procedia Computer Science 47 (2015) 400 – 407.
- [6] Vijay Kumar Tiwari, Anil Kumar Malviya, " An Energy Efficient Multicast Routing Protocol for MANET", International Journal Of Engineering And Computer Science ISSN: 2319-7242 Volume 5 Issue 11 Nov. 2016,19139-19148
- [7] SK. NagulaMeera, D. Srinivasa Kumar & D. SrinivasaRao, "Energy Efficient Multicast Routing in Mobile Ad Hoc Networks: Contemporary Affirmation of Benchmarking Models in Recent Literature", Global Journal of Computer Science and Technology: E Network, Web & Security, ISSN: 0975-4172, Volume 16 Issue 4 Version 1.0 Year 2016
- [8] Dingde Jiang et al., "An Energy-Efficient Multicast Algorithm with Maximum Network Throughput in Multi-hop Wireless Networks" JOURNAL OF COMMUNICATIONS AND NETWORKS, VOL. 18, NO. 5, OCTOBER 2016 pp 713-724.
- [9] MitraAhmadi et al., "A Hybrid Algorithm for Preserving Energy and Delay Routing in Mobile Ad-Hoc Networks", Springer Wireless PersCommun 2015.
- [10] Santosh Kumar Das et al., "Fuzzy Based Energy Efficient Multicast Routing for Ad-hoc Network", IEEE 2015.
- [11] Ahyoung Lee et al., "Network resource efficient routing in mobile ad hoc wireless networks", Springer TelecommunSyst, April 2015.
- [12] KavithaSubramaniam et al., "Efficient Buffer Management Protocol for Multicast Streaming in MANET", 2nd International Conference on Intelligent Computing, Communication & Convergence (ICCC-2016), Procedia Computer Science 92 (2016) 222 – 232.
- [13] K. SeshadriRamana et al., "Heuristicsto Multicast Route Discovery (HMRD): Energy Efficient Multicast Routing Topology for Mobile AdHoc Networks", International Journal of Applied Engineering Research ISSN 0973-4562 Volume 11, Number 7 (2016) pp 4844-4848.
- [14] S. BeskiPrabakaran et al., " Trust Based Random and Energy Efficient Routing (TRER) in MANET", International Journal of Applied Engineering Research ISSN 0973-4562 Volume 11, Number 1 (2016) pp 448-455.
- [15] Santosh Kumar Das et al., "Intelligent energy-aware efficient routing for MANET", S. Wireless Networks (2016), pp 1-21.
- [16] SK. NagulaMeera, D. Srinivasa Kumar, D. SrinivasaRao, "ECMST: Minimal Energy Usage Competent Multicast Steiner Tree based Route Discovery for Mobile Adhoc Networks", International Journal of Applied Engineering Research ISSN 0973-4562 Volume 11, Number 10 (2016) pp 6970-6975.
- [17] Ben Newton, Jay Aikat, Kevin Jeffay, "Geographic Routing in Extreme-Scale Highly- Dynamic Mobile Ad hoc Networks", 2016 IEEE, 24th International Symposium on Modeling, Analysis and Simulation of Computer and Telecommunication Systems, pp 205-210.
- [18] KasunSamarasinghe, Ricardo Wehbe and Pierre Leone, "Greedy Zone Routing: Robust and Scalable Routing in Wireless Ad-hoc Networks", 2016 30th International Conference on Advanced Information Networking and Applications Workshops, pp 557-564.

- [19] Jaspreet Singh, Chandra Shekhar Rai, "An optimized prioritized load balancing approach to scalable routing (OPLBA)", Springer's WirelessNetworks, January 2016, Volume 22, Issue 1, pp 319–334.
- [20] D.SrinivasaRao, Dr. P.V. NageswaraRao, "A Cluster Based Scalable and Energy Efficient Multi Path Routing Protocol for MANET", International Journal of Engineering Science and Computing, March 2016, Volume 6 Issue No. 3, pp 3093-3099.
- [21] Bharti Sharma, Ravinder Singh Bhatia, Awadhesh Kumar Singh, "A Logical structure based fault tolerant approach to handle leader election in mobile as hoc networks", Journal of King Saud University-Computer and Information Sciences (2015), pp 1-21.
- [22] PramitaMitra, Christian Poellabauer, "Efficient group communications in location aware mobile ad-hoc networks", Elsevier's Pervasive and Mobile Computing 8 (2012), pp229–248.